





CHANNEL PIPE >>>


Model: YK-9491

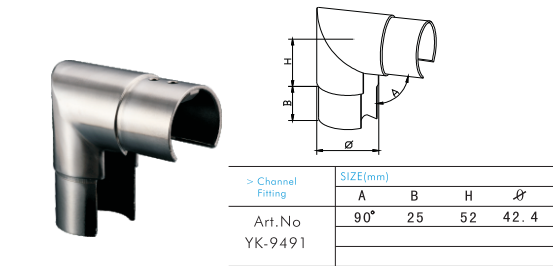


Model: YK-9492

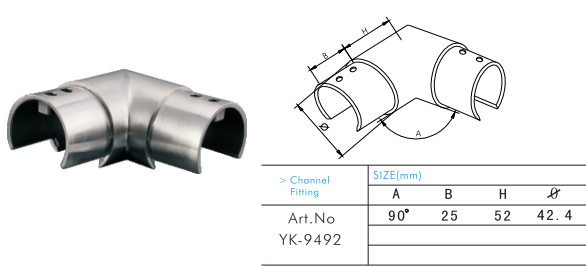


Model: YK-9493

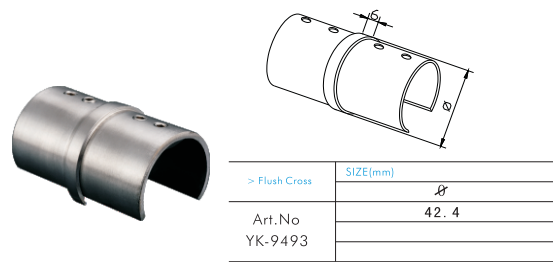


Model: YK-9494

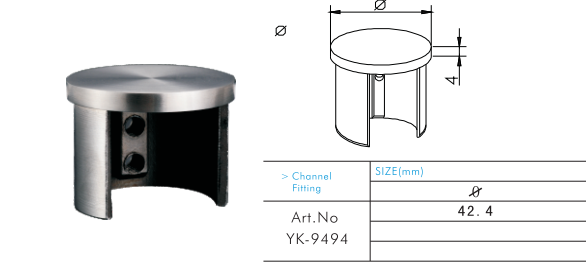




Model: YK-9495

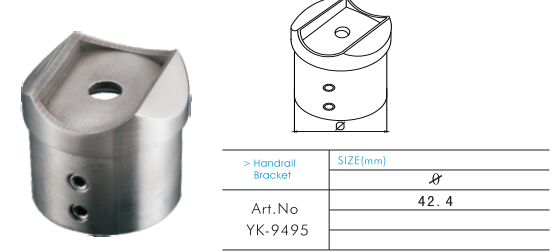

Model: YK-9526

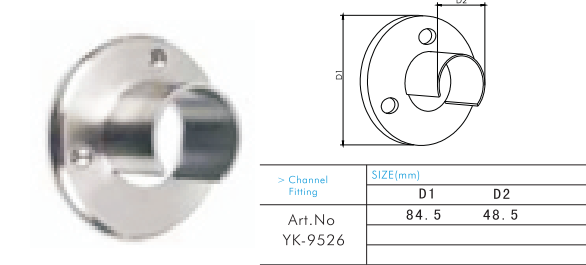

Model: YK-9352

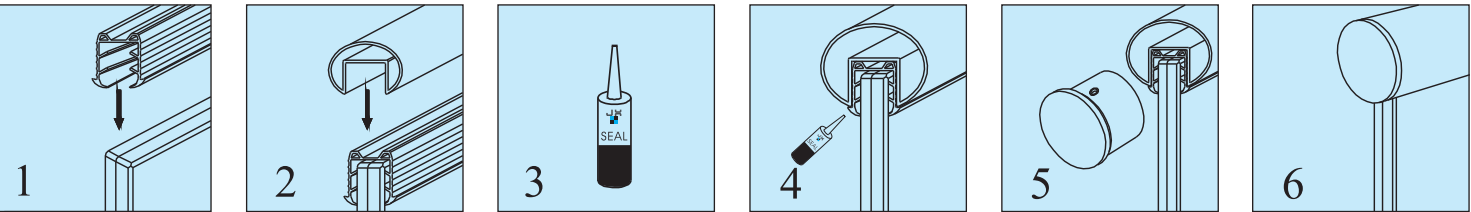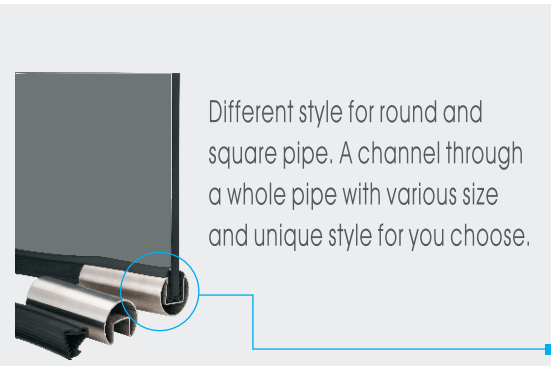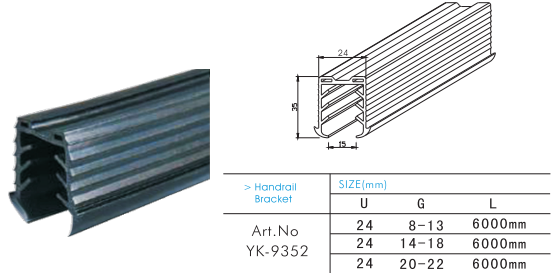

Stainless Steel Round Pipe

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:The body formation,the structure is solid,easy to install,durable and corrosion-resistant for industrial pipeline.
- ▶ Application:Machinery, medical fitness equipment, electroplating, dyeing, trains, cars, bicycles, furniture and other mechanical components and structural pieces,also applied for the decoration-finish.


Thickness (mm)	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5	3	4
Outside Diameter(mm)	YK-9489											
12.7	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5	3	
16	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5	3	
19.05	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5	3	
25.4	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5	3	
31.8	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5	3	
38.1	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5	3	
50.8				0.8	0.9	1	1.2	1.5	2	2.5	3	4
63.5				0.8	0.9	1	1.2	1.5	2	2.5	3	4
76.2				0.8	0.9	1	1.2	1.5	2	2.5	3	4
101.6				0.8	0.9	1	1.2	1.5	2	2.5	3	4
127						1	1.2	1.5	2	2.5	3	4
139.8								1.5	2	2.5	3	4
165.2								1.5	2	2.5	3	4



Stainless Steel Oval Pipe

- ▶ Meterail: High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:The body formation,the structure is solid,easy to install, durable and corrosion-resistant for architectural engineering.
- ▶ Application:Airport,building,subway,hotel,supermaket, other decoration architectural engineering and so on.
- ▶ Customized is also available.
- ▶ Welcome do OEM and ODM.


Thickness (mm)		1	1.2	1.5	2	2.5
Outer Diameter(mm)		YK-9489C				
	20*40	1	1.2	1.5	2	
	35*65	1	1.2	1.5	2	2.5
	43*58	1	1.2	1.5	2	2.5
	40*80		1.2	1.5	2	2.5
	48*76		1.2	1.5	2	2.5
	45*100		1.2	1.5	2	2.5
	55*93		1.2	1.5	2	2.5
	58*115		1.2	1.5	2	2.5
	50*120		1.2	1.5	2	2.5
	60*120		1.2	1.5	2	2.5



Stainless Steel Single U Channel Pipe

Thickness (mm)		1	1.2	1.5	2	2.5
Outside Diameter (mm)	Slot Width * Depth(mm)	YK-9352				
25.4	15*15	1	1.2	1.5	2	
42.4	24*24		1.2	1.5	2	
42.4	20*20		1.2	1.5	2	
48.3	27*30		1.2	1.5	2	
50.8	15*15		1.2	1.5	2	
60.3	34*34		1.2	1.5	2	
63.5	20*20		1.2	1.5	2	
76.2	25*25		1.2	1.5	2	
88.3	30*40		1.2	1.5	2	2.5

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:The body formation,the structure is solid,easy to install, durable and modern for glass
- ▶ Application:Airport,building,subway,hotel, supermaket, other decoration architectural engineering and so on.
- ▶ Customized is also available.
- ▶ Welcome do OEM and ODM



Stainless Steel Oval Channel Pipe

Thickness(mm)		1	1.2	1.5	2
Diameter (mm)	Slot Width * Depth(mm)	YK-9353			
30*60	15*20	1	1.2	1.5	2
40*80	24*24		1.2	1.5	2
50*100	30*30		1.2	1.5	2
40*110	33*26		1.2	1.5	2

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:The body formation,the structure is solid,easy to install, durable and modern for the galss.
- ▶ Application:Airport,building, subway,hotel, supermaket, other decoration architectural engineering and so on.
- ▶ Customized is also available.
- ▶ Welcome do OEM and ODM



90/180 Degree Double Channel Pipe

Thickness (mm)		1	1.2	1.5	2	2.5
Outside Diameter(mm)	Slot Width * Depth(mm)	YK-9351				
25.4	15*15	1	1.2	1.5	2	
42.4	24*24		1.2	1.5	2	
42.4	20*20		1.2	1.5	2	
48.3	27*30		1.2	1.5	2	
50.8	15*15		1.2	1.5	2	
60.3	34*34		1.2	1.5	2	
63.5	20*20		1.2	1.5	2	
76.2	25*25		1.2	1.5	2	
88.3	30*40		1.2	1.5	2	2.5

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:The body formation,the structure is solid,easy to install, durable and modern for the galss.
- ▶ Application:Airport,building, subway,hotel, supermaket, other decoration architectural engineering and so on.
- ▶ Customized is also available.
- ▶ Welcome do OEM and ODM



Stainless Steel Square Channel Pipe

Thickness(mm)		1	1.2	1.5	2
Diameter (mm)	Slot Width * Depth(mm)	YK-9352A			
31.8*31.8	15*15	1	1.2	1.5	2
50*40	25*20		1.2	1.5	2
60*40	24*24			1.5	
75*45	20*25			1.5	2
150*50	20*20			1.5	2
140*50	25*20			1.5	2

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:The body formation,the structure is solid,easy to install, durable and modern for glass.
- ▶ Application:Airport,building, subway,hotel,supermaket, other decoration architectural engineering and so on.
- ▶ Customized is also available.
- ▶ Welcome do OEM and ODM



Stainless Steel Square Pipe

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:The body formation,the structure is solid,easy to install, durable and corrosion-resistant for engineering structure and pipeline.
- ▶ Application:Mainly used to transport the fluid of the pipeline, such as oil, natural gas, gas, steam.
- ▶ Customized is also available.
- ▶ Welcome do OEM and ODM


Thickness(mm)	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5	3	4
Outside Size(mm)	YK-9489A											
10*10-15*15	0.5	0.6	0.7	0.8	0.9	1						
16*16-25*25	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5				
30*30-35*35			0.7	0.8	0.9	1	1.2	1.5	2	2.5		
50*50-80*80					0.9	1	1.2	1.5	2	2.5	3	4
90*90-150*150								1.5	2	2.5	3	4
20*10-30*15	0.5	0.6	0.7	0.8	0.9	1	1.2	1.5				
38*25-40*60		0.6	0.7	0.8	0.9	1	1.2	1.5	2	2.5		
75*45-120*60						1	1.2	1.5	2	2.5	3	4
120*60以上								1.5	2	2.5	3	4



Special Rectangular Pipe

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:The body formation,the structure is solid,easy to install, durable and corrosion-resistant for archite-ctural engineering.
- ▶ Application:Airport,building,subway,hotel,supermaket, other decoration architectural engineering and so on.
- ▶ Customized is also available.
- ▶ Welcome do OEM and ODM.

Thickness (mm)	1	1.2	1.5	2
Outer Size(mm)	YK-9489D			
	10*30	1	1.2	1.5
	10*40	1	1.2	1.5
	10*50	1	1.2	1.5
	10*70	1	1.2	1.5
	15*40	1	1.2	1.5
	15*45	1	1.2	1.5
	15*50	1	1.2	1.5
	15*60	1	1.2	1.5
	15*75	1	1.2	1.5
	15*65	1	1.2	1.5

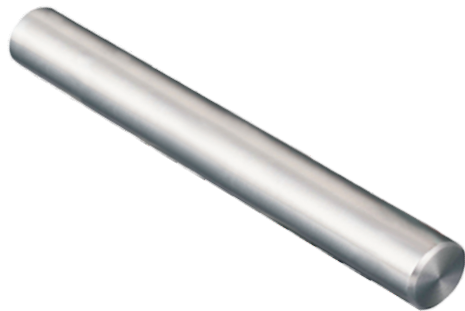

Stainless Steel Solid Rod (YK-9489B)

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:the structure is solid, easy to brend, durable and you can make different morden design.
- ▶ Application:Fabrication, Architectural, Food industry, Petro-chemical industry, Construction etc.
- ▶ Welcome do OEM and ODM.


Diameter (mm)	Weight/per meter(kg/m)
ø3	0.06
ø4	0.1
ø5	0.15
ø6	0.22
ø8	0.39
ø10	0.62
ø12	0.89
ø12.70	0.99
ø16	1.58
ø19.05	2.24
ø20	2.47
ø25	3.85
ø25.4	3.98
ø30	5.55
ø31.75	6.22
ø38.1	8.95
ø50.8	15.91
ø63.5	24.86
ø76.2	35.8



Stainless Steel Flat Bar (YK-9489E)

- ▶ Meterail:High grade stainless steel AISI 304 and 316
- ▶ Finish:Satin or mirror polish.
- ▶ Feature:the structure is solid, easy to brend, durable and you can make different morden design.
- ▶ Application:Fabrication, Architectural, Food industry, Petro-chemical industry, Construction etc.
- ▶ Welcome do OEM and ODM.

Width(mm)	Thickness(mm)											
	3	4	5	6	8	10	12	14	16	20	25	30
	Theoretical Weight (kg/m) W=0.00793*b*d											
10	0.238	0.32	0.4	0.48	0.63							
15	0.36	0.48	0.59	0.71	0.95	1.19						
20	0.476	0.63	0.79	0.95	1.27	1.59	1.9					
25	0.583	0.79	0.99	1.19	1.59	1.98	2.38					
30	0.714	0.95	1.19	1.43	1.9	2.38	2.85	3.33	3.81	4.758	5.948	
40	0.952	1.27	1.59	1.9	2.54	3.17	3.81	4.44	5.08	6.34	7.93	9.52
50	1.19	1.59	1.98	2.38	3.17	3.97	4.76	5.55	6.34	7.93	9.91	11.9
60	1.428	1.9	2.38	2.85	3.81	4.76	5.71	6.66	7.61	9.52	11.9	14.27
70		2.22	2.78	3.33	4.44	5.55	6.66	7.77	8.88	11.1	13.88	16.65
80			3.17	3.81	5.08	6.34	7.61	8.88	10.15	12.69	15.86	19.03
90			3.57	4.28	5.71	7.14	8.56	9.99	11.42	14.27	17.84	21.41
100			3.97	4.76	6.34	7.93	9.52	11.1	12.69	15.86	19.82	23.79
110				5.23	6.98	8.72	10.47	12.21	13.96	17.45	21.81	26.17
120				5.17	7.61	9.52	11.42	13.32	15.23	19.03	23.79	28.55
130				6.19	8.25	10.31	12.37	14.43	16.49	20.62	25.77	30.93
140				6.66	8.88	11.1	13.32	15.54	17.76	22.2	27.76	33.31
150				7.14	9.52	11.9	14.27	16.65	19.03	23.79	29.74	35.69

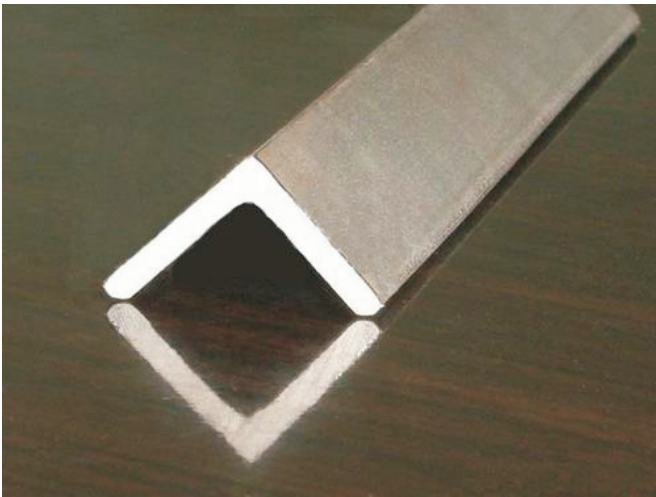







▶ Stainless Steel Angle

Measue (mm)	Weight (Kg)	Measue (mm)	Weight (Kg)	Measue (mm)	Weight (Kg)	Measue (mm)	Weight (Kg)
25*3	1.124	100*6	9.36	25*16*3	0.912	100*63*6	7.55
25*4	1.459	100*7	10.83	32*20*4	1.522	100*63*7	8.722
30*3	1.373	100*8	12.276	40*25*3	1.484	100*63*8	9.878
30*4	1.786	100*10	15.12	40*25*4	1.936	100*63*10	12.142
40*3	1.852	100*12	17.898	45*28*3	1.687	100*80*6	8.35
40*4	2.422	100*14	20.611	45*28*4	2.203	100*80*7	9.656
40*5	2.976	100*16	23.257	50*32*3	1.908	100*80*8	10.946
50*3	2.332	110*7	11.928	50*32*4	2.494	100*80*10	13.476
50*4	3.059	110*8	13.532	56*36*3	2.153	110*70*6	8.35
50*5	3.77	110*10	16.69	56*36*4	2.818	110*70*7	9.65
50*6	4.465	110*12	19.782	56*36*5	3.466	110*70*8	10.946
60*5	4.57	110*14	22.809	63*40*4	3.185	110*70*10	13.476
60*6	5.42	125*8	15.504	63*40*5	3.92	125*80*7	11.066
63*4	3.907	125*10	19.133	63*40*6	4.638	125*80*8	12.551
63*5	4.822	125*12	22.696	63*40*7	5.339	125*80*10	15.474
63*6	5.721	125*14	26.193	70*45*5	4.403	125*80*12	20.724
63*8	7.469	140*10	25.522	70*45*6	5.218	140*90*10	17.475
70*6	6.406	140*14	29.49	70*45*7	6.011	140*90*12	20.724
70*7	7.398	140*16	33.393	70*50*5	4.808	140*90*14	23.908
70*8	8.373	160*10	24.729	70*50*6	5.699	160*100*10	19.872
75*5	5.818	160*12	29.391	70*50*8	7.431	160*100*12	23.592
75*6	6.905	160*14	33.987	70*50*10	9.098	160*100*14	27.247
75*7	7.976	160*16	38.518	80*50*5	5.005	160*100*16	30.835
75*8	9.03	180*12	33.159	80*50*6	5.935	180*110*10	22.273
75*10	11.089	180*14	38.383	80*50*7	6.848	180*110*12	26.464
80*6	7.376	180*16	43.542	80*50*8	7.745	180*110*14	30.589
80*8	9.658	180*18	48.634	90*56*5	5.661	180*110*16	34.649
80*10	11.874	200*14	42.894	90*56*6	6.717	200*125*12	34.436
90*6	8.35	200*16	48.68	90*56*7	7.756	200*125*14	39.045
90*8	10.946	200*18	54.401	90*56*8	8.378	200*125*16	43.588
90*10	13.476	200*20	60.056			200*125*18	52.246
90*12	15.94	200*24	71.168				

▶ Stainless Steel C-Beam

N a m e	C o d e	M e a s u r e (m m)	W e i g h t (K g)
C S t e e l 0 1	5#	50 * 37 * 4.5	5.438
C S t e e l 0 2	6.3#	63 * 40 * 4.8	6.634
C S t e e l 0 3	8#	80 * 43 * 5.0	8.046
C S t e e l 0 4	10#	100 * 48 * 5.3	10.007
C S t e e l 0 5	12#	120 * 53 * 5.5	12.059
C S t e e l 0 6	14#A	140 * 58 * 6.0	14.535
C S t e e l 0 7	14#B	140 * 60 * 8.0	16.733
C S t e e l 0 8	16#A	160 * 63 * 6.5	17.24
C S t e e l 0 9	16#B	160 * 65 * 8.5	19.752
C S t e e l 1 0	18#A	180 * 68 * 7.0	20.174
C S t e e l 1 1	18#B	180 * 70 * 9.0	23
C S t e e l 1 2	20#A	200 * 73 * 7.0	22.637
C S t e e l 1 3	20#B	200 * 75 * 9.0	25.777
C S t e e l 1 4	22#a	220 * 77 * 7.0	24.999
C S t e e l 1 5	22#B	220 * 79 * 9.0	28.453
C S t e e l 1 6	25#A	250 * 78 * 7.0	27.41
C S t e e l 1 7	25#B	250 * 80 * 9.0	31.335
C S t e e l 1 8	25#C	250 * 82 * 11	35.26
C S t e e l 1 9	28#A	280 * 82 * 7.5	31.427
C S t e e l 2 0	28#B	280 * 84 * 9.5	35.823
C S t e e l 2 1	28#C	280 * 86 * 11.5	40.219
C S t e e l 2 2	30#A	300 * 85 * 7.5	34.463
C S t e e l 2 3	30#B	300 * 87 * 9.5	39.173
C S t e e l 2 4	30#C	300 * 89 * 11.5	43.883
C S t e e l 2 5	32#A	320 * 88 * 8.0	38.083
C S t e e l 2 6	32#B	320 * 90 * 10	43.107
C S t e e l 2 7	32#C	320 * 92 * 12	48.131
C S t e e l 2 8	36#A	360 * 96 * 9.0	47.814
C S t e e l 2 9	36#B	360 * 98 * 11	53.466
C S t e e l 3 0	36#C	360 * 100 * 13	59.118
C S t e e l 3 1	40#A	400 * 100 * 10.5	58.928
C S t e e l 3 2	40#B	400 * 102 * 12.5	65.208
C S t e e l 3 3	40#C	400 * 104 * 14.5	71.488

▶ Stainless Steel Cable (M4/M5/M6/M8/M10)



6×19+fc		6×19+iwrc		6×19+iws		6×37+fc		6×37+iwrc		6×37+iws
Diameter(M M)	Weight(KGS)		Nominal tensile strength							
			1570		1670		1770		1870	
mm	kg/100m		Steel wire minimum rupture strength.							
	Fiber Core	Steel Core	Fiber Core	Steel Core	Fiber Core	Steel Core	Fiber Core	Steel Core	Fiber Core	Steel Core
	fc	iwr	fc	iwr	fc	iwr	fc	iwr	fc	iwr
M6	12.5	13.7	17.3	18.7	18.4	19.9	19.5	21.1	20.6	22.3
M7	17	18.7	23.6	25.5	25.1	27.1	26.6	28.7	28.1	30.4
M8	22.1	24.4	30.8	33.3	32.8	35.4	34.7	37.6	36.7	39.7
M9	28	30.9	39	42.2	41.5	44.9	44	47.5	46.5	50.2
M10	34.6	38.1	48.1	52.1	51.2	55.4	54.3	58.7	57.4	62
M11	41.9	46.1	58.3	63	62	67	65.7	71.1	69.4	75.1
M12	49.8	54.9	69.4	75	73.8	79.8	78.2	84.6	82.6	89.4
M13	58.5	64.4	81.4	88	86.6	93.7	91.8	99.3	97	104
M14	67.8	74.7	94.4	102	100	108	106	115	112	121
M16	88.6	97.5	123	133	131	141	139	150	146	158
M18	112	123	156	168	166	179	176	190	186	201
M20	138	152	192	208	205	221	217	235	229	248
M22	167	184	233	252	248	268	263	284	277	300
M24	199	219	277	300	295	319	312	338	330	357
M26	234	258	325	352	346	374	367	397	388	419
M28	271	299	377	408	401	434	426	460	450	486
M30	311	343	433	469	461	498	489	528	516	558
M32	354	390	493	533	524	567.0.0	556	601	587	635
M34	400	440	557	602	592	640	628	679	663	717
M36	448	494	624	675	664	718	704	761	744	804
M38	500	550	695	752	740	800	784	848	828	896
M40	554	610	771	833	820	887	869	840	918	993